


H D Padlock

Installation and Use Instructions

This ***H D Padlock*** has been made from top quality materials and is designed to provide years of service. This lock should be used as a part of an overall security program to prevent theft of property and cargo.


This padlock uses a positive locking mechanism. The key cannot be removed from the padlock unless it is properly locked.

To install the lock, loop the ***H D Padlock*** shackle through the hasp or eye of the device to be locked. Push the lock shackle into the lock body until it stops and turn the key counterclockwise approximately 3/4 turn to the locked position. Once properly installed and locked, the key can be removed. Rotate the lock seal to cover the core and help prevent contamination from entering the lock.

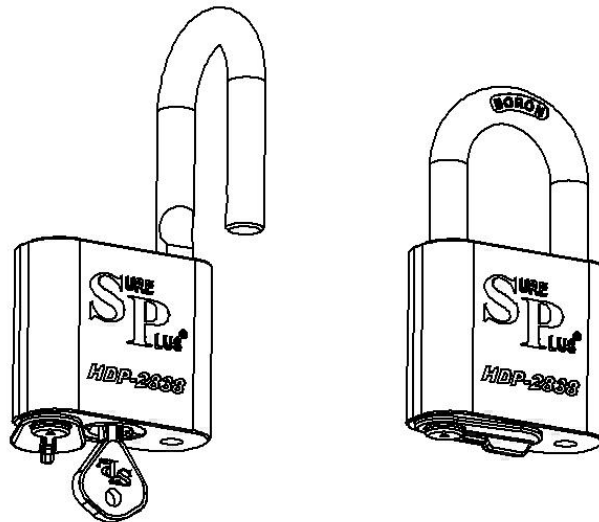

To remove the lock, insert the key into the lock cylinder and turn it clockwise approximately 3/4 turn to open the lock.

The ***H D Padlock*** requires little maintenance. If the lock is exposed to the elements for a long period of time, it may be necessary to clean and lubricate the lock with a high quality lock lubricant such

as  available at www.mil-comm.com.